



Hannay Reels®

The reel leader.

Hannay Reels, Inc., 553 State Route 143
Westerlo, NY 12193-0159
Telephone 518-797-3791 • Toll Free 1-877-GO-REELS (467-3357)
FAX 1-800-REELING (733-5464)
INT'L FAX (518) 797-3259
Website: www.hannay.com
E-mail: reels@hannay.com

INSTALLATION INSTRUCTIONS

Assembly "C" Utility Roller
for Large Frame Series Reels

NOTE: FAILURE TO FOLLOW THESE INSTRUCTIONS MAY VOID THE WARRANTY.

1. Install the two "legs" of the bracket with four 3/8" bolts and nuts as shown in FIGURE 1. If you have a bevel gear crank rewind on your reel, make sure that you use the bracket with the crank rewind opening for that side of the reel.



FIGURE 1



2. Now install the cross-member piece as shown in FIGURE 2, using four 3/8" bolts and nuts. The important point here is that the horizontal portion of the brace must be behind the vertical braces as you are looking at the reel from the front.

FIGURE 2

3. Install the two diagonal braces next, as shown in FIGURE 3, again, using four 3/8" bolts and nuts. Use the slots in these braces to position the brackets to your satisfaction before tightening all of the fasteners down.

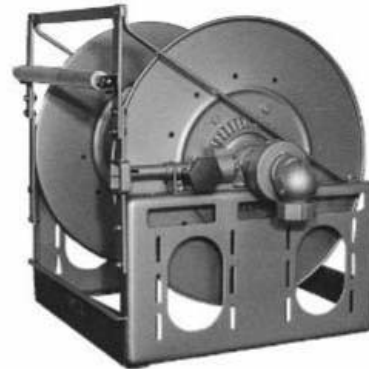


FIGURE 3

Now install the bottom horizontal roller, using two of the provided four mounting blocks and two 3/8" bolts and nuts. Again, see FIGURE 3.

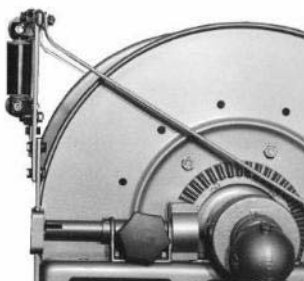


FIGURE 4



FIGURE 5

4. Finally, install the remaining 3 rollers using the other two mounting blocks and 3/8" hardware. Tighten all fasteners. Refer to FIGURES 4 & 5.