

Reel Product News


Hannay Reels Now Offers New Spray Series With Smaller Footprint

▶ Hannay's MS-1000 Series is a lightweight, compact manual reel, based on the 1000 Series reel, ideal for pressure washing, washdown and general spray operations. This series is designed with a small footprint to fit in tight spaces where needed.



MS-1012-14-16 Model Standard configuration shown

Base Mounting Hole Dimensions

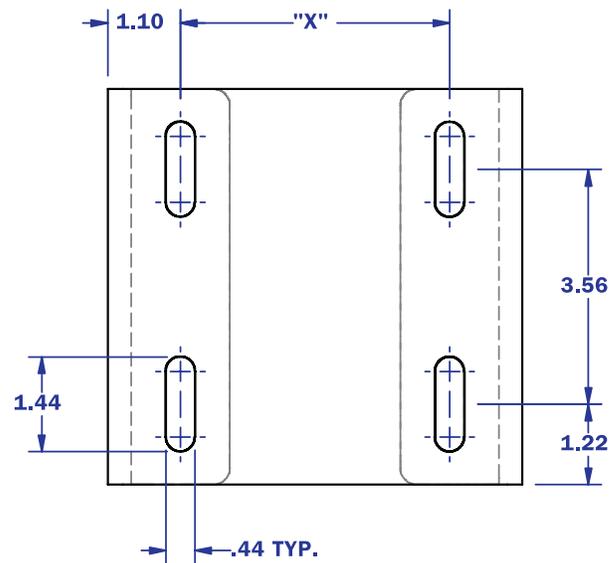

Model Number	Hose Capacity of Reel feet m		Approx. Weight Crank Rewind lb. kg			Reel Dimensions*** in. mm			
	I.D. in. mm	3/8 10	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	F	X
MS-1012-14-16	O.D. in. mm	3/4 19							
			15	10	19	26	165	101	368
MS-1014-14-16			23	42*	58	8.5	6	16.50	6.06
			23	11	19	27	216	152	419

Standard Features:

- To handle single 3/8" I.D. hose.
- Direct crank rewind permanently attached, adjustable cam-lock brake standard.
- Field installable pin lock is available.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 3/8" female NPT threads, 1/2" available upon request.
- Standard pressures to 3000 psi (207 bar), available to 5,000 psi (345 bar) - must specify.
- Standard fluid temperatures from -32° F to +400 °F (0° C to +204° C).
- Consult factory for other pressures and temperatures.

Notes:

1. Specifications subject to change.
2. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

