

# Hose Reel **Spec Worksheet**

To specify Hannay reels, fill out this simple form and mail or fax it to your dealer.  
Photocopy this page or download and print from [hannay.com](http://hannay.com)

**1. Who is the reel for?**

|                |       |          |         |
|----------------|-------|----------|---------|
| Contact        |       | Date / / |         |
| Company        |       | Division |         |
| Street Address |       |          |         |
| City           | State | Zip      | Country |
| Telephone ( )  |       | Fax ( )  |         |

**2. What is the reel for?**

**HOSE** (check one):  Storage only  Live Single hose  Live Dual hose

|                   |              |                   |                       |
|-------------------|--------------|-------------------|-----------------------|
| Inside diameter:  | Hose length: | Bend radius:      | Flat hose dimensions: |
| Outside diameter: | Hose weight: | Coupling spacing: |                       |

**Type of product handled live application (check one):**

|   |                                    |  |  |
|---|------------------------------------|--|--|
| <input type="radio"/> Liquid (specify): | <input type="radio"/> Temperature: | <input type="radio"/> Oxygen/Acetylene:          | <input type="radio"/> Other (specify): |
| <input type="radio"/> Gases (specify):  | <input type="radio"/> Pressure:    | <input type="radio"/> Hydraulic fluid (specify): |  |

**Fluid path type (check one):**  Steel (standard)  Aluminum  Stainless Steel  Other

**Reel inlet type (check one):**  Swivel joint 90° (standard)  Straight

**Reel outlet type (riser):** Size:

|                     |  |  |  |
|---------------------|--|--|--|
| Thread (check one): | <input type="radio"/> National Pipe Thread (NPT)     | <input type="radio"/> Joint Industry Committee (JIC) | <input type="radio"/> Other (specify): |
|                     | <input type="radio"/> National Standard Thread (NST) | <input type="radio"/> British Standard Pipe (BSP)    |  |

**3. What features does the reel need? Check type of rewind:**

**MANUAL REWIND**

Disc rewind (hand over hand)  Gear-driven crank  Direct crank (permanent or removable)  Chain-driven crank

**POWER REWIND**

Spring  Air  Electric (voltage):  Hydraulic

**Type of installation (check one):**  Floor  Wall  Overhead  Vehicle


Temperature Range: \_\_\_\_\_ Environment: \_\_\_\_\_

Accessories (if any): \_\_\_\_\_ Hose Stop:  Yes  No

Roller Assemblies: \_\_\_\_\_

**Finish:**  Painted steel (standard)  Aluminum  Polished  Unpolished  Stainless steel  Polished  Unpolished

**Check type of installation and roller position for spring reels:**

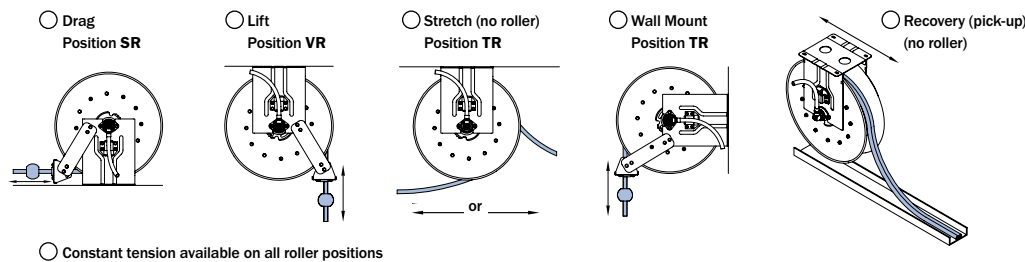


**For custom applications not found in our catalogs, call the Inside Sales Group at 518-797-3791.**

**Indicate your custom specifications**

**4. Specifying Location of Components**

**Optional Location of Components:**  
Location of the inlet, outlet riser, and rewind mechanism can be varied to meet your requirements and **must be specified on your order**. Unless otherwise specified, most reels will be shipped as **Right Top Rewind** with the inlet, outlet riser, and rewind mechanism on the operator's right.



**Note:** Use component location initials as suffix after model number (ie: E1520-17-18 LT)

**5. Please note size and/or weight limitations for your installation**

**SPECIFICATIONS**

Depth: \_\_\_\_\_

Height: \_\_\_\_\_

Width: \_\_\_\_\_

Weight: \_\_\_\_\_