Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 122
PARTS LIST

1" Hose Reel, Aluminum

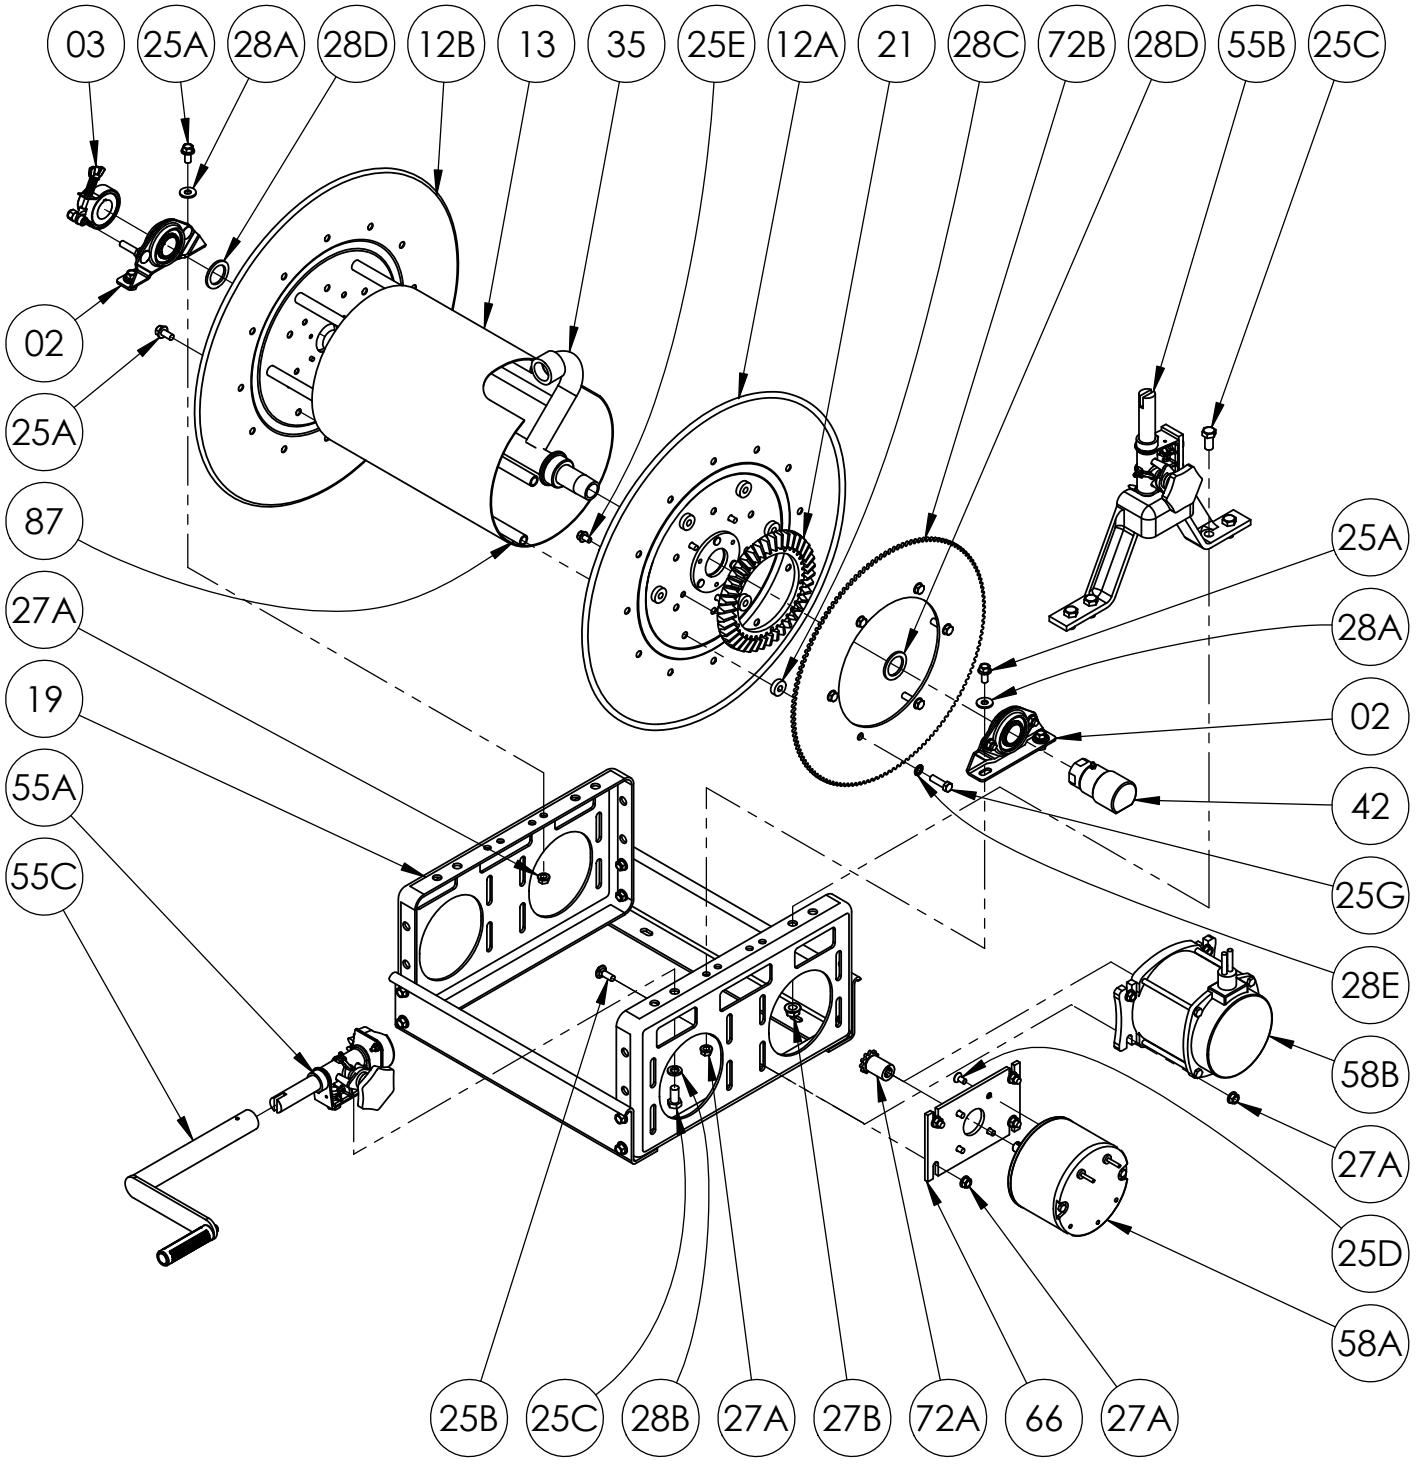

PARTS LIST
ISO 122
1” Hose Reel, Aluminum

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL

USE PART NUMBER!

Item #.	Description	UnPolished	Polished	Qty
02	1" Pipe-Size Self Aligning Bearing Complete (see ISO-210 for parts)	9902.1400	9902.1400	2
03	Band (Comet) Brake Assembly (Bearing Mounted) (see ISO-212 for parts)	9947.0090	9947.0090	1
06	#35 Chain (not shown)	Spec Model	Spec Model	1
12A	Aluminum Disc w/ Ring Gear Holes	Specify Model/Serial Number		1
12B	Aluminum Disc w/out Ring Gear Holes	Specify Model/Serial Number		1
13	Drum, 10-1/2" Dia .125 Aluminum (Specify Model up to 29.5" width)	9905.5132	9905.5132	1
19	Small Aluminum Pressed Frame Assembly - 19-20 or 23-24 (Specify Model)	9908.2300	9908.2400	1
19	Large Aluminum Pressed Frame Assembly - 25-26 or 30-31 (Specify Model) (not shown)	9908.3300	9908.3400	1
21	H-26 Ring Gear	9914.0372	9914.0372	1
25A	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	9904.2201	10
25B	3/8"-16 x 1" Steel Carriage Bolt w/ Nut (for Motor Plate) (includes 27A)	9904.0200	9904.0200	4
25C	1/2"-13 x 1" Hex Head Bolt	9904.1402	9904.1402	2 or 4
25D	5/16"-18 x 5/8" Hex Flat Head Socket Screw (for Non-Explosion Proof Motor)	9958.0027	9958.0027	4
25E	5/16"-18 x 1/2" Spinlock Bolt	9904.2158	9904.2158	5
25F	3/8"-16 x 7/8" Button Head Cap Screw (for 180T35 Sprocket ONLY) (not shown)	9904.9201	9904.9201	6
25G	3/8"-16 x 1-1/4" Hex Head Cap Screw (for 138T35 Sprocket)	9904.1203	9904.1203	6
27A	3/8"-16 Spinlock Nut	9904.6200	9904.6200	8
27B	1/2"-13 Spinlock Nut (for Vertical Rewind)	9904.5400	9904.5400	4
27C	3/8"-16 Hex Jam Nut (for 180T35 Sprocket ONLY) (not shown)	9965.0012	9965.0012	6
28A	3/8" Flat Washer	9954.0007	9954.0007	4
28B	1/2" Split Lock Washer (Armor Coat)	9954.0030	9954.0030	2
28C	EH-765 Special Spacer for Disc Sprocket (1" x 5/16" w/ 3/8" Hole)	9954.0017	9954.0017	6
28D	1" Hub Spacer Washer - Plated (1-7/8" OD x 1-5/16" ID x 1/8" Thick)	9954.0021	9954.0021	As Req.
28E	3/8" Internal Tooth Lock Washer (for 138T35 Sprocket)	9954.0095	9954.0095	6
35	1" Iron Pipe Hub Assembly - E-Coated (Specify Model/Serial Number and Riser Fitting)	9901.2307	9901.2307	1
42	1" 90 FxF Steel 4000 PSI Super Swivel Joint (GLT VITON) (HR42-0004)	9929.8552	9929.8552	1
55A	Right-Hand Manual Rewind Assembly w/ H-27 (up to and incl. 25-26) (see ISO-209 for parts)	9914.0200	9914.0200	1
55A	Left-Hand Manual Rewind Assembly w/ H-27 (up to and incl. 25-26) (see ISO-209 for parts) (not shown)	9914.0180	9914.0180	1
55A	Right-Hand Manual Rewind Assembly w/ H-29 (larger than 25-26) (see ISO-209 for parts) (not shown)	9914.0210	914.0210	1
55A	Left-Hand Manual Rewind Assembly w/ H-29 (larger than 25-26) (see ISO-209 for parts) (not shown)	9914.0190	9914.0190	1
55B	VR-2 Vertical Rewind Assembly w/ H-27 (for reels up to and including 25-26) (see ISO-209 for parts)	9914.0223	9914.0223	1
55C	H-18 Steel Hand Crank - 10" Length (E-Coated) (see ISO-214 for parts)	9914.0011	9914.0011	1
58A	AN-227 12V DC Face Mount 1/3 HP 650 RPM Non-Explosion Proof Motor	9915.0042	9915.0042	1
58A	AN-248 24V DC Face Mount 1/3 HP 650 RPM Non-Explosion Proof Motor (Optional)	9915.0173	9915.0173	1
58B	SX-001 12V DC Flange Mount 1/2 HP 650 RPM Explosion Proof Motor	9915.0003	9915.0003	1
58B	SX-123 24V DC Flange/Base Mount 1/2 HP 650 RPM Explosion Proof Motor (Optional)	9915.0113	9915.0113	1
66	Motor Mounting Plate for Non-Explosion Proof Motor, per P66A-00030 (GH-131)	9923.0008	9923.0008	1
72A	11T35 Motor Sprocket, 1-3/4" Long (Plated) (for Non-Explosion Proof Motors)	9910.1119	9910.1119	1
72A	11T35 Motor Sprocket, 1-5/16" Long (Plated) (for Explosion Proof Motors) (not shown)	9910.1118	9910.1118	1
72B	138T35 Disc Sprocket, 16-5/8" Dia. (Chrome Silver) - for 23-24 and 25-26 Discs	9910.1447	9910.1447	1
72B	112T35 Disc Sprocket, 13-3/8" Dia. (Chrome Silver) - for 19-20 Discs (not shown)	9910.1323	9910.1323	1
72B	180T35 Disc Sprocket, 21-3/84" Dia. (Chrome Silver) - for 30-31 Discs (not shown)	9910.1527	9910.1527	1
73A	Woodruff Key #9 (3/16" x 3/4") (for Explosion Proof Motor and Strap Brake) (not shown)	9916.0080	9916.0080	2
73B	Woodruff Key #61 (3/16" x 5/8") (for Non-Explosion Proof Motor) (not shown)	9916.0081	9916.0081	1
87	Anodized Aluminum Threaded Spacer Pipe	Spec Model	Spec Model	6