Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 220
PARTS LIST
ESF SERIES

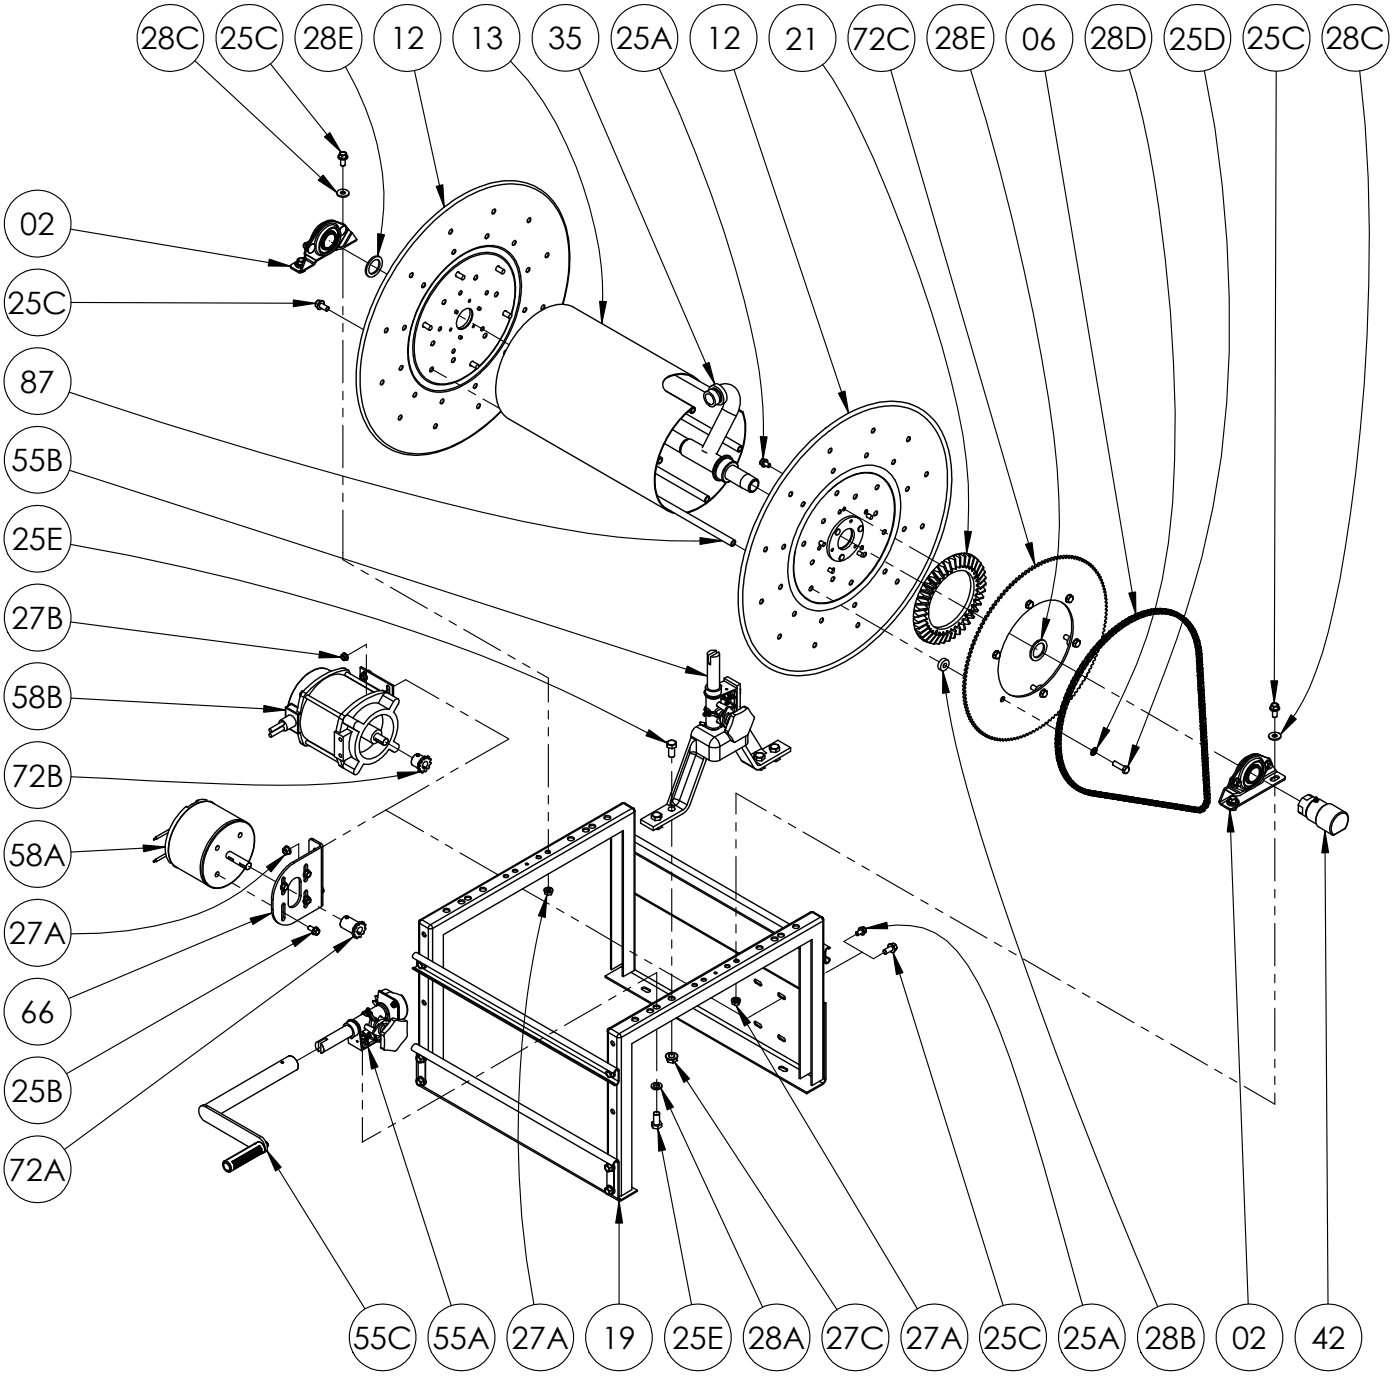

PARTS LIST
ISO 220
ESF Series

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL

USE PART NUMBER!

Item #	Description	Part #	Qty
02	1" Pipe-Size (1.287" I.D.) Self Aligning Bearing Complete (see ISO-210 for parts)	9902.1400	2
06	Chain, #35	Specify Model	1
12	(25-26) 24.75" Dia. Disc 14 GA - E-Coated (Specify Model & Front/Back)	9903.1321	2
12	(19-20) 18.75" Dia. Disc 14 GA - E-Coated (Specify Model & Front/Back) (not shown)	9903.0821	2
12	(23-24) 22.75" Dia. Disc 14 GA - E-Coated (Specify Model & Front/Back) (not shown)	9903.1121	2
12	(30-31) 28.75" Dia. Disc 14 GA - E-Coated (Specify Model & Front/Back) (not shown)	9903.1621	2
13	Drum, 10-1/2" Dia. 14 GA Steel (Specify Model)	9905.3131	1
19	1-1/2" Rollform Frame Assembly (Specify Model)	Specify Model	1
21	H-26 Ring Gear	9914.0372	1
25A	5/16"-18 x 1/2" Spinlock Bolt (for H-26 Ring Gear and Explosion-Proof Motor)	9904.2158	5 or 9
25B	5/16" x 5/8" Hex Spinlock Bolt (for Non Explosion-Proof Motor)	9904.2159	4
25C	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	10 or 12
25D	3/8"-16 x 1-1/4" Hex Head Cap Screw (for 138T35 Disc Sprocket)	9904.1203	6
25E	1/2"-13 x 1" Hex Head Bolt (for Manual Rewind Assemblies)	9904.1402	2 or 4
27A	3/8"-16 Spinlock Nut	9904.6200	4 or 6
27B	5/16"-18 Hex Head Small Flange Spinlock Nut (for Explosion-Proof Motor)	9904.5100	4
27C	1/2"-13 Hex Spinlock Nut (for Vertical Rewind)	9904.5400	4
28A	1/2" Split Lock Washer (Armor Coat)	9954.0030	2
28B	EH-765 Special Spacer for Disc Sprocket (1" x 5/16" w/ 3/8" Hole)	9954.0017	6
28C	3/8" Flat Washer	9954.0007	4
28D	3/8" Lock Washer, Internal Tooth	9954.0095	6
28E	1" Hub Spacer Washer - Plated (1-7/8" O.D. x 1-5/16" I.D. x 1/8" Thick)	9954.0021	As Req'd.
35	1" Steel Hub Assembly (thru H2M) (Specify Model)	9901.1600	1
42	1" 90 Degree FxF Steel 4000 PSI Super Swivel Joint (GLT VITON) (HR42-0004)	9929.8552	1
55A	Right-Hand Manual Rewind Assembly w/ H-27	9914.0200	1
55A	Left-Hand Manual Rewind Assembly w/ H-27 (not shown)	9914.0180	1
55B	VR-2 Vertical Rewind Assembly w/ H-27	9914.0223	1
55C	H-18 Steel Hand Crank - 10" Length (E-Coated) (see ISO-214 for parts)	9914.0011	1
58A	AN-227 12V DC Face Mount 1/3 HP 650 RPM Non Explosion-Proof Motor	9915.0042	1
58B	SX-102 12V DC Base Mount 1/2 HP 650 RPM Explosion-Proof Motor	9915.0013	1
66	ESF Motor Mounting Plate (Right Angle) w/ Hardware (E-Coated) - for "AN" Motors, per P66A-00200 (includes Item 25B)	9923.0015	1
72A	11T35 Motor Sprocket - 1-3/4" Long (Plated) (for Non Explosion-Proof Motor)	9910.1119	1
72B	11T35 Motor Sprocket - 1-1/16" Long (Plated) (for Explosion-Proof Motor)	9910.1117	1
72C	138T35 Disc Sprocket - 16-5/8" Dia. (E-Coated)	9910.1423	1
72C	112T35 Disc Sprocket - 13-3/8" Dia. (E-Coated) (not shown)	9910.1321	1
72C	180T35 Disc Sprocket - 21-3/4" Dia. (E-Coated) (not shown)	9910.1526	1
87	Anodized Aluminum Threaded Spacer Pipe	Specify Model	6