Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 230
PARTS LIST
ESFCR1600 Series

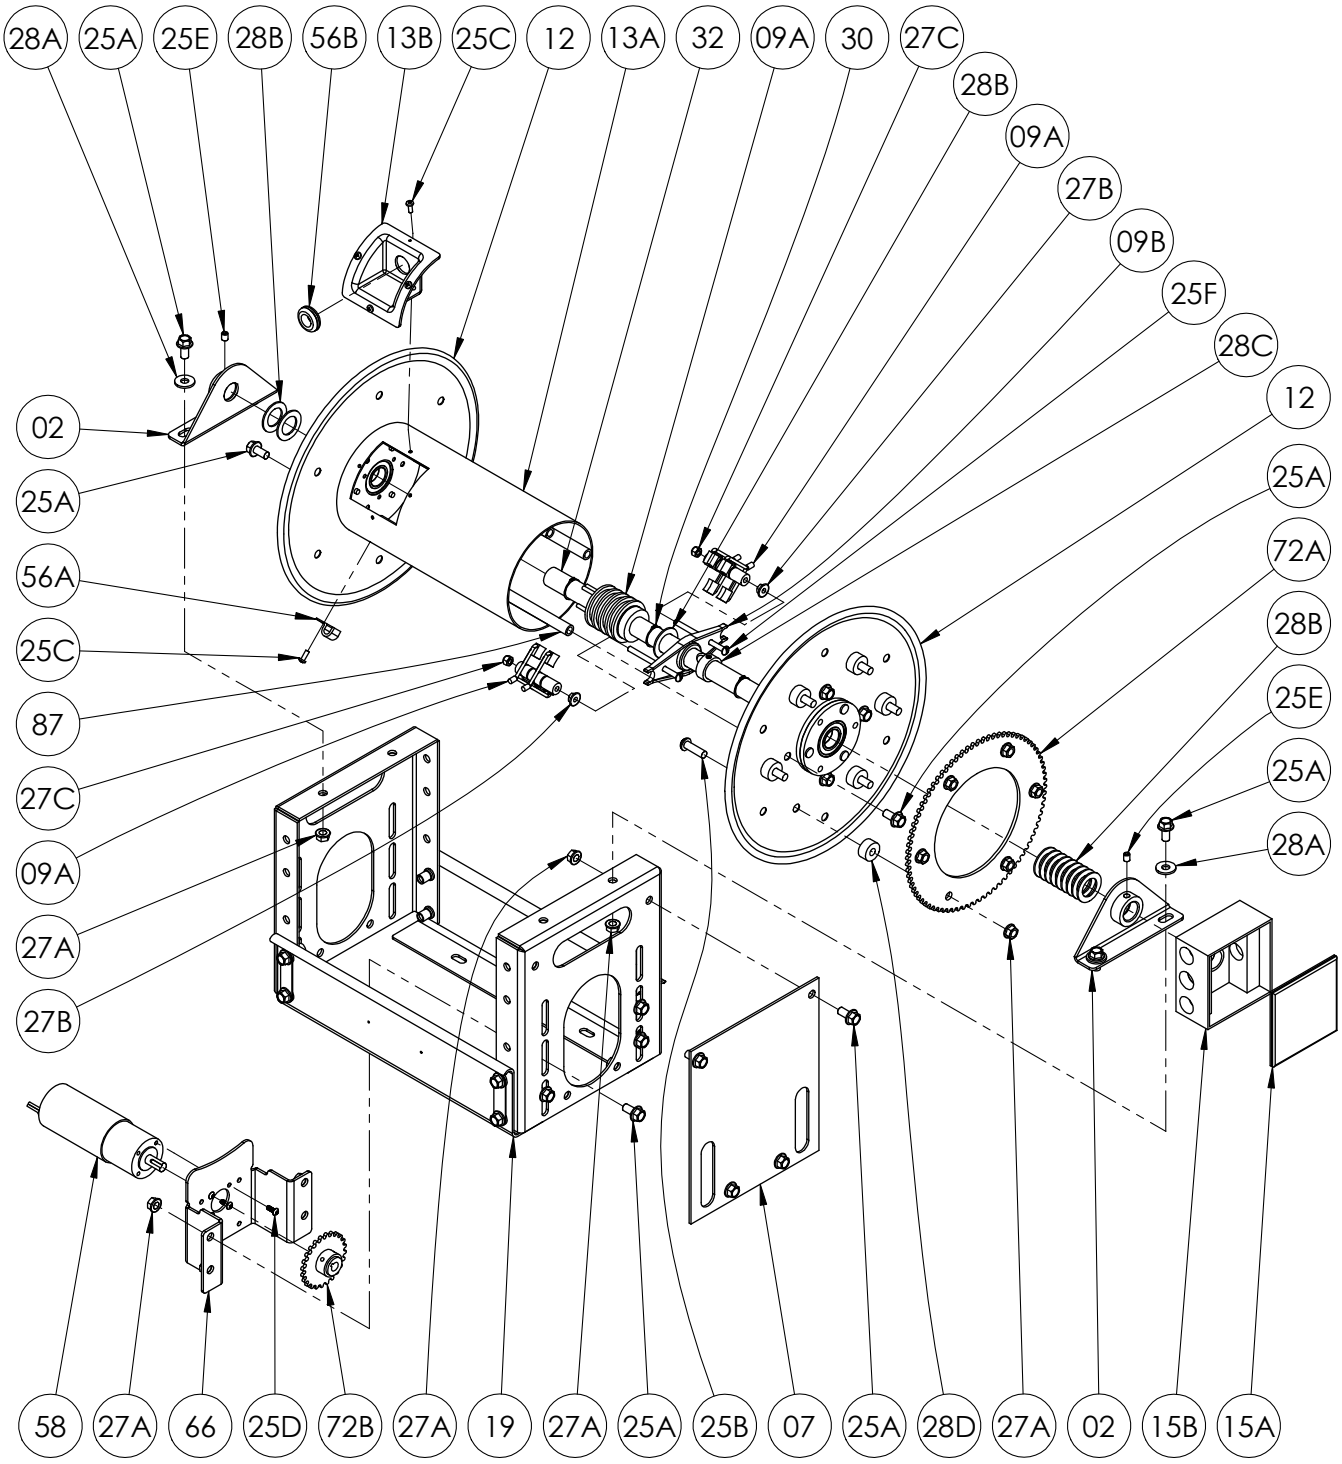

PARTS LIST
ISO 230
ESFCR1600 Series

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL

USE PART NUMBER!

Item #	Description	Part #	Quantity
02	Stationary Pillow Block Bearing Assembly, per P02A-00520	9902.2830	2
06	Length of #35 Chain - 40-1/2" Long (108 Links) w/ Connecting Link (not shown)	9912.0034	1
07	Flat Metal Chain Guard Cover for ESF Frames, per P07A-00650	9957.0045	1
09A	4 Conductor 30 Amp 600V Collector Assembly - 1" Bore (Optional)	9942.0427	1
09A	3 Conductor 30 Amp 600V Collector Assembly - 1" Bore (not shown)	9942.0327	1
09B	Nylon Brush Holder	9955.0054	1
12	(14-16) 14" Dia. E-Coated Disc w/ EH-936 Disc Washers and Bearing	9903.0303	2
13A	Drum, 6" Dia. Aluminum Pipe (Specify Model)	9905.7112	1
13B	6" Dia. Drum Insert (Plastic) w/ 1" Grommet Hole	9955.0019	1
15A	Aluminum Junction Box Cover w/ Gasket (4.5" Square)	9955.0049	1
15B	Aluminum Junction Box (4.5" x 4.5" x 2")	9955.0048	1
19	ESF Series E-Coated Frame Assembly (Specify Model)	9908.2031	1
25A	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	20
25B	3/8"-16 x 1" Button Socket Head Cap Screw (for Sprocket Mounting)	9904.9202	6
25C	#10 x 1/2" Long Self Tap Type AB Pan Head Screw (for Drum Insert and Cable Clamp)	9958.0003	5
25D	M5 x 0.8 x 14mm Hex Socket Button Head Cap Screw (for Motor Mounting)	9904.9051	4
25E	5/16"-18 x 3/8" Allen Set Screw w/ Nylok	9958.0007	2
25F	1/4"-20 x 6" Round Head Slotted Screw (for 4 Conductor reels)	9958.0012	2
25F	1/4"-20 x 3" Round Head Slotted Screw (for 3 Conductor reels) (not shown)	9958.0036	2
27A	3/8"-16 Spinlock Nut	9904.6200	18
27B	1/4"-20 Large Flange Spinlock Nut	9904.6002	2
27C	1/4"-20 Nylon Lock Nut (for Collector Assembly)	9904.6001	2
28A	3/8" Flat Washer	9954.0007	4
28B	Hub Spacer (1-5/8" O.D. x 1" I.D. x 0.075" Thick)	9954.0035	As Req'd.
28C	PSC-1 Pinion Shaft Collar w/ Set Screw	9914.0351	1
28D	Sprocket Spacer Washer (1" O.D. x 0.381" I.D. x 1/2" Thick), per P28A-00760	9954.0015	6
30	1" External Retaining Ring	9951.0021	3
32	Hub for ESFCR1600 Series, per P32A-00520	9955.1050	1
56A	1/2" Cable Clamp (Vinyl Coated)	9955.0015	1
56B	1" Rubber Grommet	9955.0032	1
58	DZ 12V DC Face Mounting 1/18 HP 90 RPM (32:1) Gear Motor	9915.1010	1
66	ESF (DZ) Steel Motor Plate, per P66A-01660	9923.0047	1
72A	80T35 Disc Sprocket (Chrome Silver)	9910.1318	1
72B	24T35 Sprocket, 7/8" Long (12mm Bore)	9910.1024	1
87	Anodized Aluminum Threaded Spacer Pipe	Specify Model	4