Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 48
PARTS LIST

MODELS
1100 / AT1100 / GH1100 Hose Reels
C1150 / AVC1150 Storage Reels

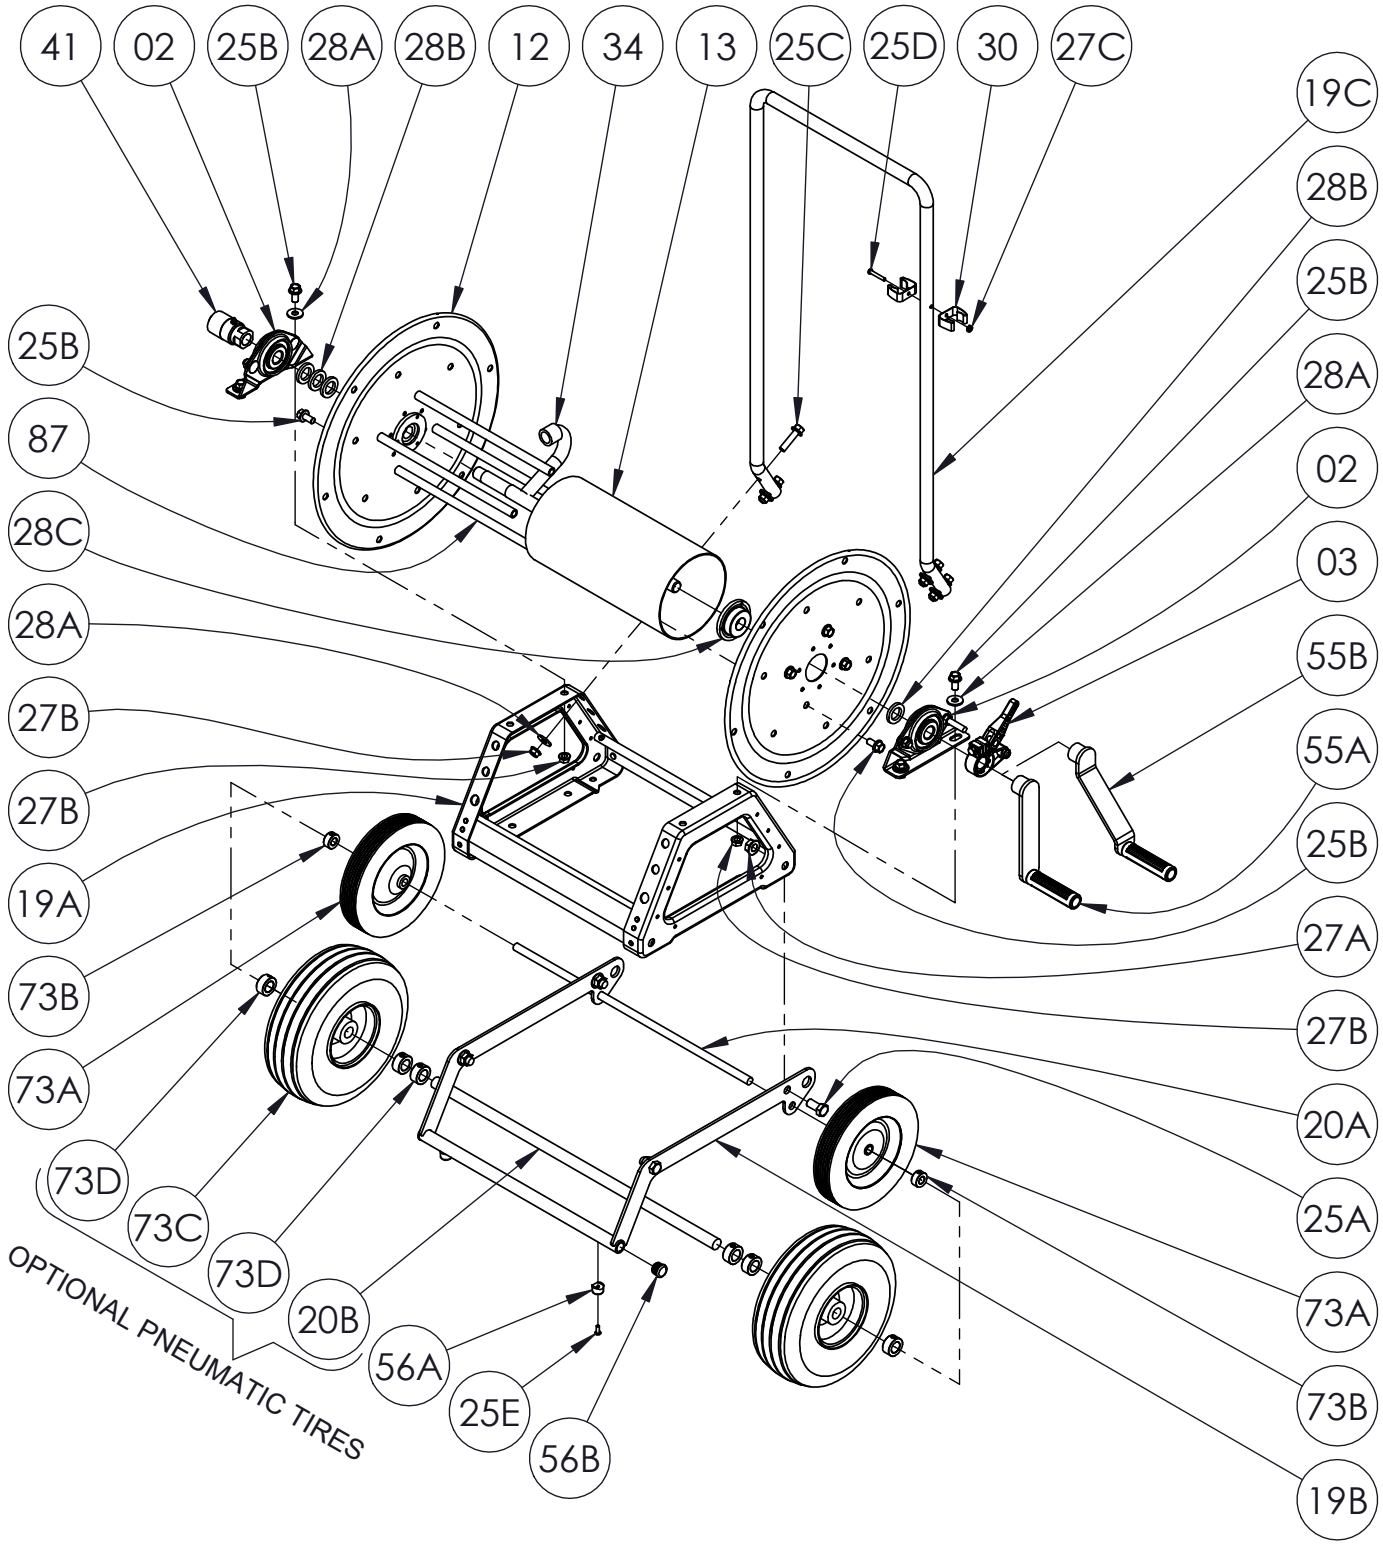

PARTS LIST
ISO 48
MODEL 1100 / AT1100 / GH1100 / C1150 / AVC1150

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL

USE PART NUMBER!

Item #	Description	Part #	Qty
02	1/2" Pipe-Size (0.826" I.D.) Self Aligning Bearing Complete (see ISO-210 for parts)	9902.1200	2
03	Cam Lever Drag Brake Complete (see ISO-254 for parts)	9947.0130	1
12	(17-18) 16.5" Dia. 14 GA Steel	9903.0516	2
13	Drum, 6" Dia. Aluminum Pipe (Specify Model)	9905.7112	1
19A	Trapezoid Frame Assembly - Steel E-Coated (Specify Model)	9908.1000	1
19B	Front Foot Assembly w/ Hardware, per P20A-03940 (includes Items 25A & 27A)	9906.0736	1
19C	Push Pipe Handle	9906.0731	1
20A	1/2" Dia. 303 Stainless Steel Axle (21" Long)	9906.0735	1
25A	1/2"-13 x 1" Hex Head Bolt	9904.1402	4
25B	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	12
25C	3/8"-16 x 1-1/2" Spinlock Bolt	9904.2204	4
25D	#10-32 x 1-1/4" Slotted Round Head Machine Screw (for Broom Clips)	9904.8205	1
25E	#10-32 x 1/2" Self Tap Type AB Pan Head Screw (for Rubber Bumpers)	9958.0003	2
27A	1/2"-13 Hex Spinlock Nut	9904.5400	4
27B	3/8"-16 Spinlock Nut	9904.6200	8
27C	#10-32 Nut (for Broom Clips)	9904.4900	1
28A	3/8" Flat Washer	9954.0007	8
28B	1/2" Hub Spacer Washer - Plated (1-3/8" O.D. x 7/8" I.D. x 3/16" Thick)	9954.0020	As Req'd.
28C	Disc Washer, per P28A-01160	9965.0040	2
30	3/4" Retaining Clip (#225L)	9965.0055	2
31	5' Lead-In Garden Hose (GH1100 Series only) (not shown)	9965.0060	1
32	1/2" Straight Iron Pipe Hub (C1150 Series only) (not shown)	9901.1050	1
34	1/2" Welded Iron Pipe Hub - 1/2" FNPT Riser Outlet (1100 Series only)	9901.0610	1
34	1/2" Welded Iron Pipe Hub - 1/2" GHT Riser Outlet (GH1100 Series only)	9901.0610	1
41	1/2" 90 Deg. FxF Steel 5,000 PSI Super Swivel Joint (AFLAS) (for 1100 and GH1100 Series only)	9927.8551	1
55A	Hand Crank Complete (see ISO-255 for parts)	9914.0021	1
56A	Rubber Front Foot Bumper	9965.0059	2
56B	End Cap (CCF-3/4 14-20)	9958.0060	2
73A	Wheel/Tire (1.75" x 8") for 1/2" Axle Dia.	9965.0065	2
73B	Shaft Collar (1" O.D. x 1/2" I.D. x 7/16" Thick)	9955.0251	2
87	Anodized Aluminum Threaded Spacer Pipe	Specify Model	4
	OPTIONAL PNEUMATIC TIRES ONLY		
20B	3/4" Dia. 303 Stainless Steel Axle (25-1/4" Long)	9906.0739	1
55B	Offset Hand Crank (for Pneumatic Tires) (see ISO-255 for parts)	9914.0071	1
73C	Wheel/Tire (4" x 10") for 3/4" Axle Dia.	9965.0066	2
73D	Shaft Collar (1-1/4" O.D. x 3/4" I.D. x 9/16" Thick)	9955.0252	6