Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 57
PARTS LIST

3" HOSE REELS

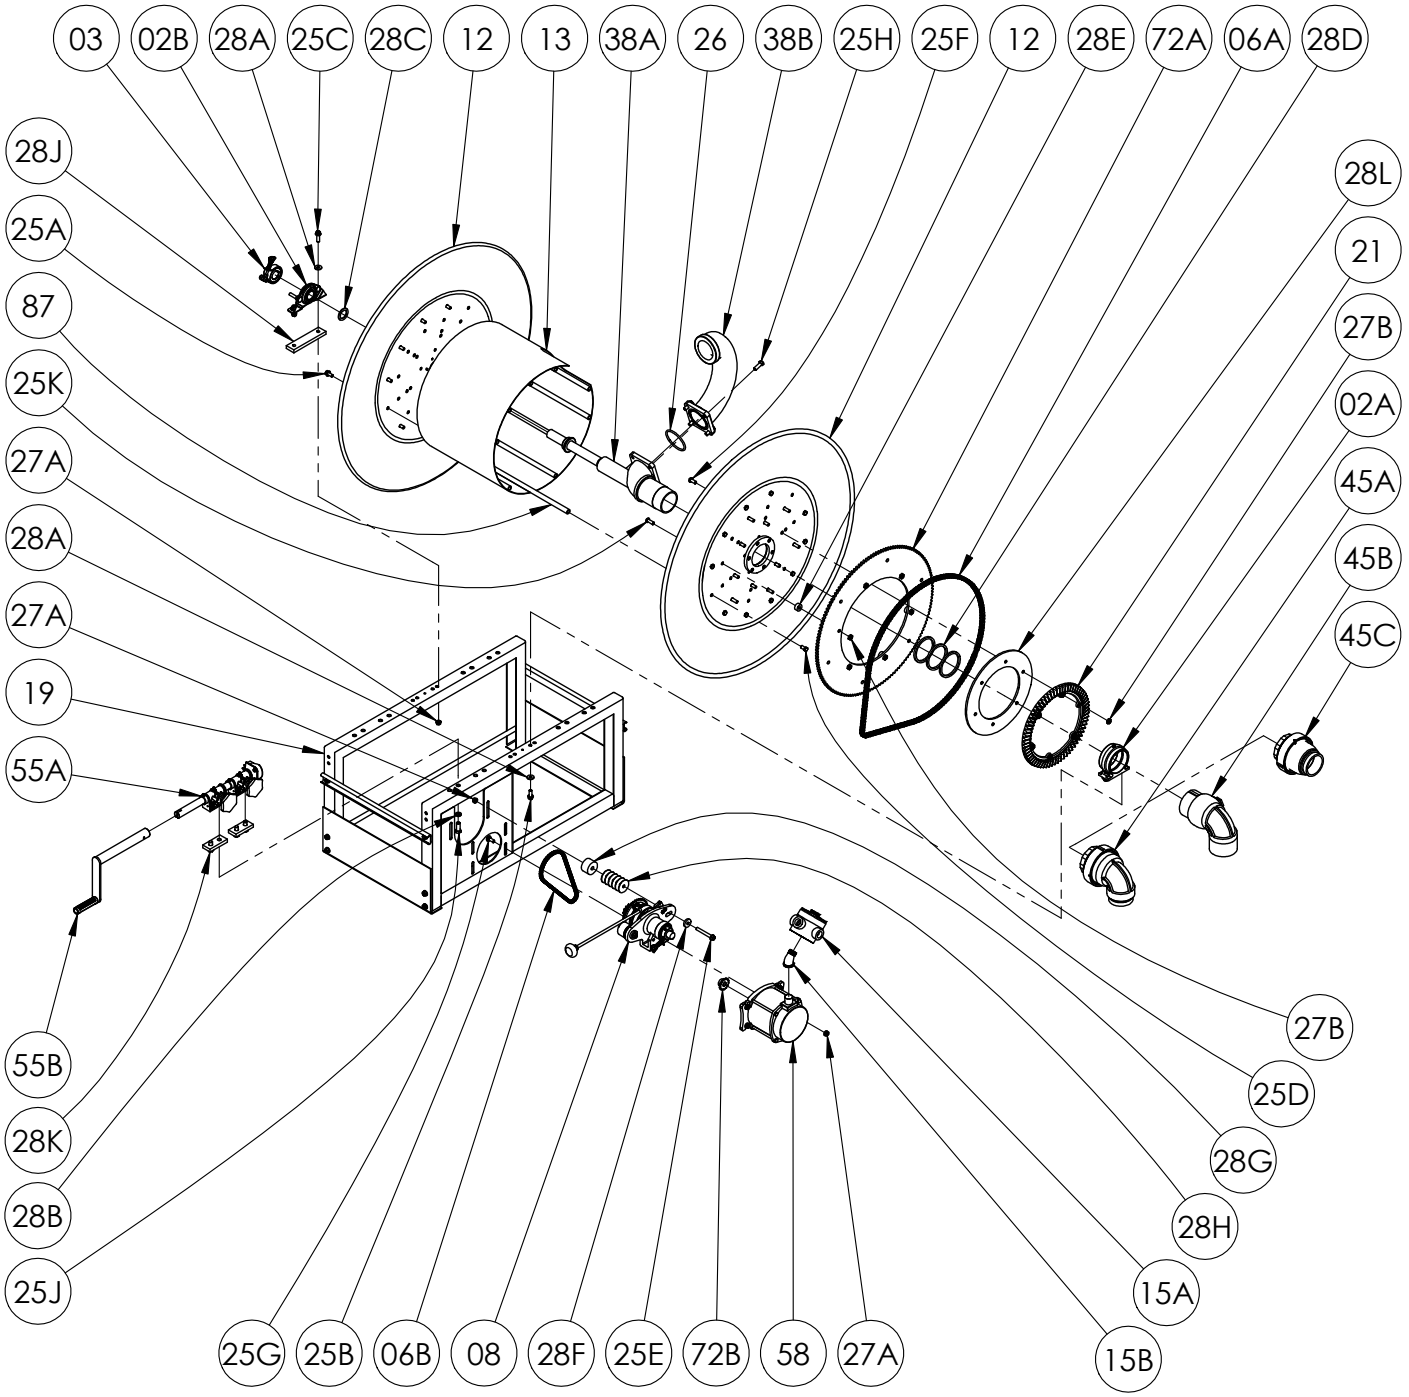

PARTS LIST
ISO 57
3” HOSE REELS

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL

USE PART NUMBER!

Item No.	Description	Part No.	Quantity
02A	H-43 3" Bearing	9902.2400	1
02B	1" Pipe-Size (1.287" I.D.) Self Aligning Bearing Complete (see ISO-210 for parts)	9902.1400	1
03	Band (Comet) Brake Assembly (see ISO-212 for parts)	9947.0090	1
06A	#40 Chain (for Disc Sprocket)	Specify Model	1
06A	#35 Chain (for Disc Sprocket) (not shown)	Specify Model	1
06B	#35 Chain (for Clutch/Reduction Unit)	Specify Model	1
08	Manual Clutch/Reduction Unit (see ISO-160 for parts)	Specify Model	1
08	Electric Clutch/Reduction Unit (see ISO-249 for parts) (not shown)	Specify Model	1
12	Disc Assembly (includes Disc Washer)	Specify Model	1
13	Drum, 20" Dia. 14 GA Steel (Specify Model)	9905.3191	1
15A	Red Dot 5-Port Round Junction Box Complete	9917.0060	1
15B	3/4" MxF 45 Degree Galvanized Street Elbow	9950.0015	1
19	2" Rollform Frame Assembly	Specify Model	1
21	H-28 Ring Gear	9914.0382	1
25A	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	11
25B	3/8"-16 x 1" Spinlock Bolt	9904.2202	2
25C	3/8"-16 x 1-1/4" Spinlock Bolt	9904.2203	2
25D	3/8"-16 x 3/4" Hex Head Cap Screw	9904.1201	11
25E	3/8"-16 x 3" Hex Head Cap Screw (for Clutch/Reduction Unit)	9904.1208	2
25F	3/8"-16 x 7/8" Button Socket Head Cap Screw	9904.9201	6
25G	3/8"-16 x 1" Steel Carriage Bolt w/ Nut (for Motor Mounting) (includes Item 27A)	9904.0200	4
25H	7/16"-14 x 1-1/4" Hex Head Bolt (for Riser Flange)	9904.1303	4
25J	1/2"-13 x 1-1/4" Hex Head Bolt (for Manual Rewind)	9904.1403	2 or 4
25K	3/8"-16 x 1-1/2" Button Socket Head Cap Screw (for Sprocket Mounting)	9904.9203	6
26	3-3/4" (BUNA) O-Ring for 3" Riser	9965.0025	1
27A	3/8"-16 Spinlock Nut	9904.6200	8
27B	3/8"-16 Hex Jam Nut	9965.0012	12
28A	3/8" Flat Washer	9954.0007	4
28B	1/2" Split Lock Washer (Armor Coat)	9954.0030	2 or 4
28C	1" Hub Spacer Washer - Plated (1-7/8" O.D. x 1-5/16" I.D. x 1/8" Thick)	9954.0021	As Req'd.
28D	3" Hub Spacer Washer (4" O.D. x 3.5" I.D. x 1/8" Thick)	9954.0018	As Req'd.
28E	EH-765 Special Spacer for Disc Sprocket (1" x 5/16" w/ 3/8" Hole)	9954.0017	6
28F	Spacer Washer for Reduction Unit (1.25" O.D. x 0.406" I.D. x 1/4" Thick)	9954.0047	2
28G	Clutch/Reduction Unit Spacer (2" O.D. x 1-1/4" Thick)	9954.0049	2
28H	Clutch/Reduction Unit Spacer (2" O.D. x 1/32" Thick)	9954.0048	As Req'd.
28J	Spacer Block for 1" Self Aligning Bearing, per P28A-00430	9954.0001	1
28K	Pinion Bearing Aluminum Spacer Block (1/2" x 1-1/2" x 3-1/2"), per KDF1208	9914.0248	1 or 2
28L	Backing Plate for H-28 (E-Coated)	9914.0582	1
38A	3" Flange Aluminum Hub, only (Specify Model)	9901.7842	1
38B	3" FNPT Aluminum Riser for 20" Drum	9901.7462	1
45A	3" 90 Deg FxVIC Aluminum 150 PSI OPW Swivel Joint (BUNA)	9933.6302	1
45B	3" 90 Deg FxF Ductile Iron 600 PSI OPW Swivel Joint (BUNA)	9933.6500	1
45C	3" Straight FxVIC Aluminum 150 PSI OPW Swivel Joint (BUNA)	9933.6702	1
55A	Double Bearing Manual Rewind Assembly w/ H-29 (see ISO-209 for parts)	9914.0211	1
55A	Right-Hand Manual Rewind Assembly w/ H-29 (see ISO-209 for parts) (not shown)	9914.0210	1
55A	Left-Hand Manual Rewind Assembly w/ H-29 (see ISO-209 for parts) (not shown)	9914.0190	1
55B	H-18 Steel Hand Crank - 10" Length (E-Coated) (see ISO-214 for parts)	9914.0011	1
58	SX-001 12V DC Flange 1/2 HP 650 RPM Explosion Proof Motor	9915.0003	1
72A	146T40 Disc Sprocket - 23-1/2" Dia. (E-Coated) (for 39-40 and up)	9910.3128	1
72A	180T35 Disc Sprocket - 21-3/4" Dia. (E-Coated) (up to 35-36) (not shown)	9910.1526	1
72B	11T35 Motor Sprocket (Lengths from 3/4" up to 1-3/4")	Specify Model	1
87	Anodized Aluminum Threaded Spacer Pipe	Specify Model	11