Hannay Reels®
The reel leader.

Hannay Reels, Inc.
553 State Route 143, Westerlo, NY 12193
www.hannay.com
Email: reels@hannay.com

Phone 1-518-797-3791
Toll Free 1-877-GO-REELS (467-3357)
Fax 1-800-REELING (733-5464)
Int'l Fax 1-518-797-3259

ISO 84
PARTS LIST
1" HOSE REELS

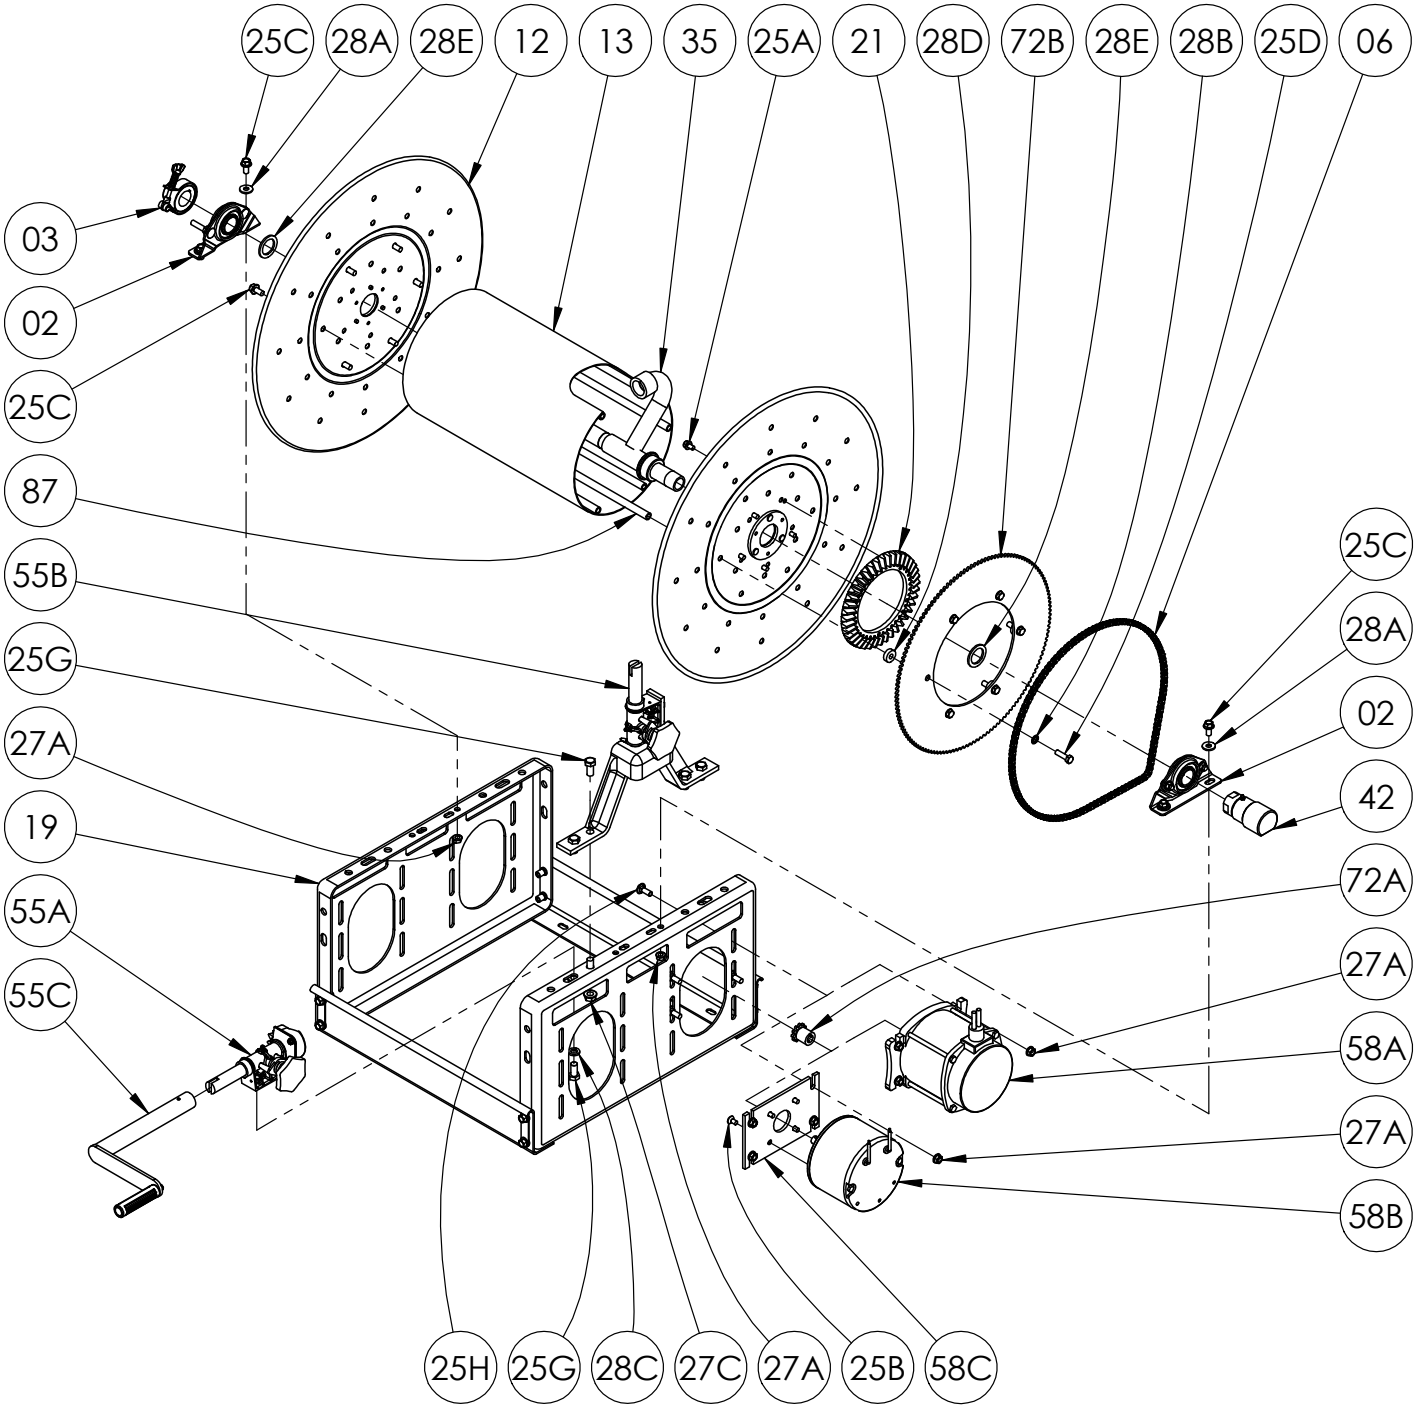

PARTS LIST
ISO 84
1”Hose Reels

When Ordering Parts
BE SURE TO SPECIFY COMPLETE MODEL NUMBER and SERIAL NUMBER OF REEL
USE PART NUMBER!

Item	Description	Part No.	Qty
02	1" Pipe-Size Self Aligning Bearing Complete (see ISO-210 for parts)	9902.1400	2
03	Band (Comet) Brake (Bearing Mounted) Complete (see ISO-212 for parts)	9947.0090	1
06	#35 Chain	Spec Model	1
12	Disc Assembly	Spec Model/Serial #	2
13	Drum, 10-1/2" Dia 14 Gauge Steel (Specify Model - up to 32" width)	9905.3131	1
19	Large Steel Pressed Frame Assembly - Up to 30-31 (Specify Model)	9908.3000	1
19	Small Steel Pressed Frame Assembly - Up to 23-24 (Specify Model) (not shown)	9908.2000	1
21	H-26 Ring Gear (Up to 25-26)	9914.0372	1
21	H-28 Ring Gear (26-27 and above) (not shown)	9914.0382	1
25A	5/16"-18 x 1/2" Spinlock Bolt (for H-26 Ring Gear)	9904.2158	5
25B	5/16"-18 x 5/8" Hex Flat Head Socket Screw	9958.0027	4
25C	3/8"-16 x 3/4" Spinlock Bolt	9904.2201	10 or 16
25D	3/8"-16 x 1-1/4" Hex Head Cap Screw (for 138T35 Sprocket)	9904.1203	6
25E	3/8"-16 x 1" Spinlock Bolt (for H-28 Ring Gear) (not shown)	9904.2202	6
25F	3/8"-16 x 1" Button Socket Head Cap Screw (for 180T35 Sprocket) (not shown)	9904.9202	6
25G	1/2"-13 x 1" Hex Head Bolt	9904.1402	2 or 4
25H	3/8"-16 x 1" Steel Carriage Bolt w/ Nut (for Motor Plate) (includes 27A)	9904.0200	4
27A	3/8"-16 Spinlock Nut	9904.6200	8
27B	3/8" Hex Head Jam Nut (for 180T35 Sprocket) (not shown)	9965.0012	6
27C	1/2"-13 Spinlock Nut (for Vertical Rewind)	9904.5400	4
28A	3/8" Flat Washer	9954.0007	4
28B	3/8" Internal Tooth Lock Washer (for 138T35 Sprocket)	9954.0095	6
28C	1/2" Split Lock Washer (Armor Coat)	9954.0030	2
28D	EH-765 Special Spacer for Disc Sprocket (1" x 5/16" w/ 3/8" Hole)	9954.0017	6
28E	1" Hub Spacer Washer - Plated (1-7/8" OD x 1-5/16" ID x 1/8" Thick)	9954.0021	As Req.
29A	Woodruff Key #9 (3/16" x 3/4") (for Explosion Proof Motor and Strap Brake) (not shown)	9916.0080	2
29B	Woodruff Key #61 (3/16" x 5/8") (for Non-Explosion Proof Motor) (not shown)	9916.0081	1
35	1" Steel Hub Assembly - Thru H2M (Specify Model/Serial Number)	9901.1600	1
42	1" 90 FxF Steel 4000 PSI Super Swivel Joint (GLT VITON) (HR42-0004)	9929.8552	1
55A	Right-Hand Manual Rewind Assembly w/ H-27 (up to and incl. 25-26) (see ISO-209 for parts)	9914.0200	1
55A	Left-Hand Manual Rewind Assembly w/ H-27 (up to and incl. 25-26) (see ISO-209 for parts) (not shown)	9914.0180	1
55A	Right-Hand Manual Rewind Assembly w/ H-29 (larger than 25-26) (see ISO-209 for parts) (not shown)	9914.0210	1
55A	Left-Hand Manual Rewind Assembly w/ H-29 (larger than 25-26) (see ISO-209 for parts) (not shown)	9914.0190	1
55B	VR-2 Vertical Rewind Assembly w/ H-27 (see ISO-209 for parts)	9914.0223	1
55C	H-18 Steel Hand Crank - 10" Length (E-Coated) (see ISO-214 for parts)	9914.0011	1
58A	SX-001 12V DC Flange Mount 1/2 HP 650 RPM Explosion Proof Motor	9915.0003	1
58B	AN-227 12V DC Face Mount 1/3 HP 650 RPM Non-Explosion Proof Motor	9915.0042	1
58C	Motor Mounting Plate (for Non-Explosion Proof Motor), per P66A-00030 (GH-131)	9923.0008	1
72A	11T35 Motor Sprocket, 1-5/16" Long (Plated)	9910.1118	1
72A	11T35 Motor Sprocket, 1-3/4" Long (Plated) (for Non-Explosion Proof Motors)	9910.1119	1
72B	138T35 Disc Sprocket, 16-5/8" Dia - for 23-24 and 25-26 Discs	9910.1423	1
72B	112T35 Disc Sprocket, 13-3/8" Dia - for 19-21 Discs (not shown)	9910.1321	1
72B	180T35 Disc Sprocket, 21-3/4" Dia - for 30-31 Discs (not shown)	9910.1526	1
87	Anodized Aluminum Threaded Spacer Pipe	Spec Model	6